Balflex®

# 90° Swept Female ORFS Swivel

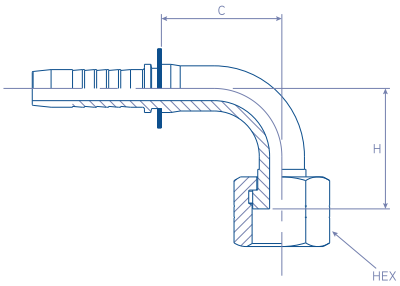


## 23.4494.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

| REFERENCE | hose<br>dash | hose Ø<br>inch | thread<br>inch | C cut off<br>mm | H<br>mm | HEX<br>mm |
|---|---|---|---|---|---|---|
| 23.4494.0404 | -4 | 1/4" | 9/16" – 18 | 26.0 | 21.0 | 17 |
| 23.4494.0406 | -4 | 1/4" | 11/16" – 16 | 27.0 | 25.0 | 22 |
| 23.4494.0506 | -5 | 5/16" | 11/16" – 16 | 33.0 | 27.5 | 22 |
| 23.4494.0606 | -6 | 3/8" | 11/16" – 16 | 34.5 | 29.0 | 22 |
| 23.4494.0608 | -6 | 3/8" | 13/16" – 16 | 35.5 | 30.0 | 24 |
| 23.4494.0808 | -8 | 1/2" | 13/16" – 16 | 40.0 | 35.0 | 24 |
| 23.4494.0810 | -8 | 1/2" | 1" – 14 | 40.5 | 36.5 | 30 |
| 23.4494.0812 | -8 | 1/2" | 1.3/16" – 14 | 42.0 | 43.0 | 36 |
| 23.4494.1008 | -10 | 5/8" | 13/16" – 16 | 42.0 | 46.0 | 24 |
| 23.4494.1010 | -10 | 5/8" | 1" – 14 | 54.0 | 50.0 | 30 |
| 23.4494.1012 | -10 | 5/8" | 1.3/16" – 14 | 53.0 | 48.0 | 36 |
| 23.4494.1210 | -12 | 3/4" | 1" – 14 | 55.0 | 50.0 | 30 |
| 23.4494.1212 | -12 | 3/4" | 1.3/16" – 14 | 57.0 | 49.0 | 36 |
| 23.4494.1216 | -12 | 3/4" | 1.7/16" – 12 | 57.0 | 52.0 | 41 |
| 23.4494.1616 | -16 | 1" | 1.7/16" – 12 | 68.0 | 59.0 | 41 |
| 23.4494.1620 | -16 | 1" | 1.11/16" – 12 | 68.0 | 77.0 | 50 |
| 23.4494.2020 | -20 | 1.1/4" | 1.11/16" – 12 | 85.0 | 77.0 | 50 |
| 23.4494.2424 | -24 | 1.1/2" | 2" - 12 | 98.0 | 94.0 | 60 |

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating / ROHS compliant

**VERSIONS:** Stainless Steel (add an 'S' at the end of the REFERENCE)



Balflex assumes no liability for typographical errors or other errors. For any precise technical information you must always contact our technical department. Dimensions and Data shown may be changed without notice.